


# Pendant & Suspended Specification sheet



**SOVEREIGN®**

Manufactured in the UK by  
Commercial Lighting Systems Ltd

+44 (0)1489 581002  
sales@commercial-lighting.co.uk  
www.commercial-lighting.co.uk

## Globe

### Wire Suspended LED Pendant




#### Technical

IP rating	IP20
CRI	>80
Lamp Life	50,000 hours
Light Source	Tridonic LLE + CLE
Voltage	240V
Driver	Integrated / remote
Wattage	22W / 35W / 52W
Colour Temperature	3000K / 4000K
Control	Dimmable options available
LED Warranty	5 Years

#### Housing

Material	Polyethylene / aluminium housing
Finish	Matt
Housing Colour	White
Protection Rating	Class 1
Optics	Polyethylene
Mounting	Wire suspension
Weight	Size 1 2.5KG / Size 2 3.5KG / Size 3 7KG
Dimensions	Ø280mm / Ø380mm / Ø550mm


#### Photometry



#### Light Output

Size	CCT	Wattage	Lumens	Sys Efficacy
Ø280mm	3000K	22W	3166lm	144lm/W
Ø280mm	4000K	22W	3396lm	154lm/W
Ø380mm	3000K	35W	4840lm	138lm/W
Ø380mm	4000K	35W	5040lm	144lm/W
Ø550mm	3000K	52W	7530lm	146lm/W
Ø550mm	4000K	52W	7947lm	153lm/W

#### Dimensions

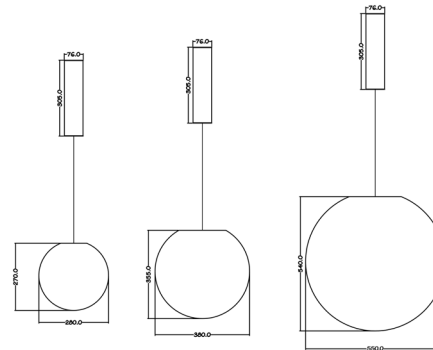

#### Order Code

Version	Size	Housing Colour	Version	Emergency		Control		Suffix
S98674	Globe			Ignore if Non-EM & Non-dimming				
	/280 Size 1	/5 White	00 3000K 280mm	/10 Non-EM	0 On / off			.8
	/380 Size 2		01 4000K 280mm	/11 Non maintained EM	1 1-10V dimming			
	/550 Size 3		02 3000K 380mm	/14 Maintained 3HR EM	2 DALI dimming			
			03 4000K 380mm		6 DMX			
			04 3000K 550mm		7 Bluetooth			
			05 4000K 550mm					

Disclaimer text:

Commercial Lighting Systems Ltd uses quality components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Colour temperature is subject to a tolerance of up to +/-150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Commercial Lighting is continually developing and improving its products and reserves the right to change technical specifications without prior notice.