

# ECOBLADE SLOT FREE STANDING UPLIGHTER

S18542



An exceptionally high performance range of top quality uplighters, specifically designed around the latest high efficiency Tridonic LLE modules, offering superb performance of up to 163lm/W. Available in a range of styles including uplight only or up/downlight.

Main housing produced from extruded aluminium with integral passive thermal management. All versions supplied with Nano/Micropism diffuser for optimum light transmission and visual comfort. Finished in textured polyester powder coat with standard finishes in white, black and silver, with other BS/RAL colours available to order.



## RANGE DETAILS

CATALOGUE NUMBER	S18542
APPLICATION	INTERIOR WALL
LIGHT SOURCE	TRIDONIC LLE
LAMP LIFE	50,000 HOURS
COLOUR RENDERING (CRI)	>80
VOLTAGE	240V
PROTECTION RATING	CLASS 1
DIFFUSER	NANO / MICROPRISM
IP RATING	IP40
MATERIAL FINISH	TEXTURED POWDER COATED
HOUSING MATERIAL	ALUMINIUM
WEIGHT	300mm 2.5KG / 400mm 2.9KG / 600mm 3.7KG / 900m 5.4KG
LED WARRANTY	5 YEARS

## CUSTOMISATION OPTIONS

STYLE	UP OR UP/DOWN
COL TEMP	3000K / 4000K
HOSUING COLOUR	BLACK / WHITE
LENGTH	300MM / 400MM / 600MM / 900MM
DIMMABILITY	DIMMABLE OPTIONS AVAILABLE
EMERGENCY	AVAIALBLE WITH EMEREGECNY OPTIONS

## LIGHT OUTPUT DETAILS


### UPLIGHTER

LENGTH	COL. TEMP	WATTAGE	LUMEN OUTPUT	LED EFFICACY
300mm	3000K	13W	2030lm	156lm/W
300mm	4000K	13W	2120lm	163lm/W
400mm	3000K	13W	2030lm	156lm/W
400mm	4000K	13W	2120lm	163lm/W
600mm	3000K	26W	4050lm	156lm/W
600mm	4000K	26W	4240lm	163lm/W
900mm	3000K	39W	6080lm	156lm/W
900mm	4000K	39W	6360lm	163lm/W

### UP / DOWN

LENGTH	COL. TEMP	WATTAGE	LUMEN OUTPUT	LED EFFICACY
400mm	3000K	20W	3043lm	152lm/W
400mm	4000K	20W	3180lm	159lm/W
600mm	3000K	33W	5063lm	153lm/W
600mm	4000K	33W	5300lm	161lm/W
900mm	3000K	52W	8105lm	156lm/W
900mm	4000K	52W	8479lm	163lm/W

## DIMENSIONS (MM)

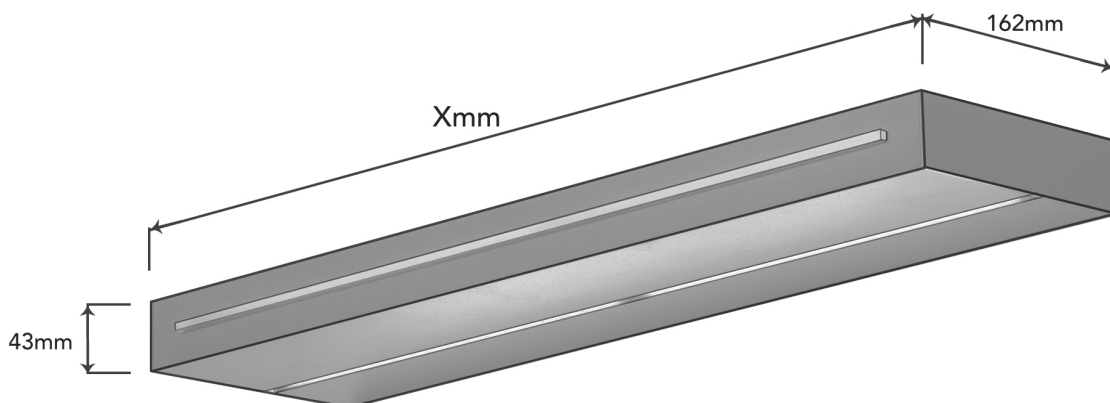

## ORDER CODE

RANGE	HOUSING COLOUR	VERSION	EMERGENCY	POWER SUPPLY	
<b>S18542</b> ECOBLADE SLOT WALL LIGHT	<b>.X5</b> TEXTURED WHITE	<b>04S</b> 300MM 3000K UPLIGHT	<b>/10</b> NON EM	<b>0</b> NON DIMMING	
	<b>.X4</b> TEXTURED BLACK	<b>05S</b> 300MM 4000K UPLIGHT	<b>/11</b> NON MAINTAINED EM	<b>1</b> 1-10V DIMMING	
	<b>.X2</b> TEXTURED SILVER	<b>04</b> 400MM 3000K UPLIGHT	<b>/14</b> MAINTAINED		<b>2</b> DALI DIMMING
		<b>05</b> 400MM 4000K UPLIGHT			<b>3</b> MAINS DIMMING
			<b>00</b> 600MM 3000K UPLIGHT		<b>4</b> DSI DIMMING
			<b>01</b> 600MM 4000K UPLIGHT		<b>5</b> SWITCH DIMMING
			<b>08</b> 900MM 3000K UPLIGHT		<b>6</b> DMX
			<b>09</b> 900MM 4000K UPLIGHT		
			<b>06</b> 400MM 3000K UP/DOWN		
			<b>07</b> 400MM 4000K UP/DOWN		
			<b>02</b> 600MM 3000K UP/DOWN		
			<b>03</b> 600MM 4000K UP/DOWN		
			<b>10</b> 900MM 3000K UP/DOWN		
		<b>11</b> 900MM 4000K UP/DOWN			

Disclaimer text:  
 Commercial Lighting Systems Ltd uses quality components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Colour temperature is subject to a tolerance of up to +/-150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Commercial Lighting is continually developing and improving its products and reserves the right to change technical specifications without prior notice.