



SOVEREIGN ROUND MINIMAL WALLWASH PROJECTOR

S18368WW

Our signature LED projector, the Sovereign Round Minimal Projector boasts a beautifully minimal design thanks to the driver being incorporated within the main lamp housing. This wallwasher version features a specially shaped housing for optimal light spread. Designed around the latest Tridonic SLE LED modules.

Available with dimming gear as an option with track adaptor or ceiling plate mounting. Standard colours black, white, and silver as standard with other BS/RAL colours to order.

PRODUCT DETAILS

RANGE NAME	SOVEREIGN ROUND WALLWASH PROJECTOR
CATALOGUE NUMBER	S18368WW
APPLICATION	INTERIOR CEILING
LIGHT SOURCE	TRIDONIC SLE LED
LAMP LIFE	50,000 HOURS
COLOUR RENDERING (RA)	>80
VOLTAGE	240V
DRIVE CURRENT	250mA / 350mA
PROTECTION RATING	CLASS 1
DRIVER	INTEGRATED HIGH EFFICIENCY
IP RATING	IP40
HOUSING MATERIAL	ALUMINIUM
MATERIAL FINISH	POWDER COATED
WEIGHT	0.66KG
LED WARRANTY	5 YEARS

CUSTOMISATION OPTIONS


MOUNTING	TRACK ADAPTER / CEILING PLATE
HOSUING COLOUR	WHITE / BLACK / SILVER / OTHER BS/RAL
COL. TEMP	3000K / 4000K
OUTPUT	HIGH EFFIECIENCY (9.4W) / NORMIMAL (13.6W)
DIMMABILITY	DIMMABLE OPTIONS AVAILABLE

LIGHT OUTPUT DETAILS

Col. Temp	Wattage	Lumen Output	LED Efficacy
3000K	9.4W	1346lm	143lm/W
4000K	9.4W	1423lm	151lm/W
3000K	13.6W	1824lm	134lm/W
4000K	13.6W	1928lm	142lm/W



DIMENSIONS

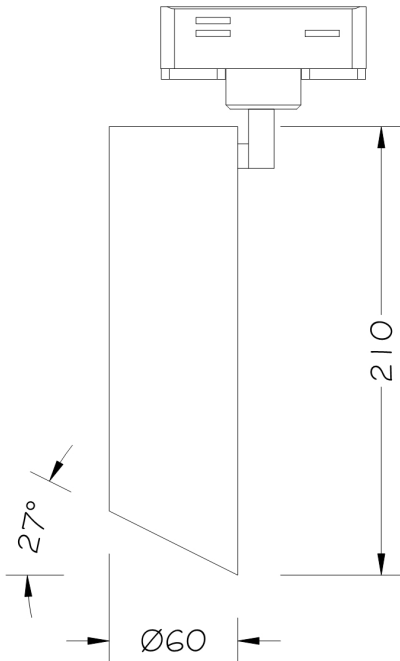

ORDER CODE

STYLE	REFLECTOR	MOUNTING	HOUSING COLOUR	COL TEMP	DIMMABILITY
S18368 ROUND MINIMAL	WW WALL WASHER	/TR TRACK ADAPTER	/05 WHITE	00 9.4W 3000K	[BLANK] NON DIMMING
		/CP CEILING PLATE	/04 BLACK	02 9.4W 4000K	/101 1-10V DIMMING
			/21 SILVER	03 13.6W 3000K	/102 DALI DIMMING
				04 13.6W 4000K	/103 MAINS DIMMING
					/104 DSI DIMMING
					/105 SWITCH DIM
					/106 DMX

Disclaimer text:

Commercial Lighting Systems Ltd uses quality components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Commercial Lighting is continually developing and improving its products and reserves the right to change technical specifications without prior notice.